



**Catena grado 80
Lifting chain G80**

Applicable normes: UNI EN 818-2


Acciaio legato Alloy steel

Grado 80

Finitura Finishing

- Zincata elettrolitica
Electro galvanized

Imballo Packaging

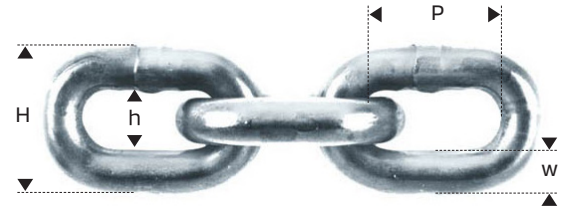

codice art. art. code	w mm	p mm	h min. mm	H max. mm	peso kg/mt weight kg/mt	carico lav. ton WLL ton	carico rott. kN BF kN	fusto drum (200 lt) mt	fusto drum (100 lt) mt	fusto drum (50 lt) mt	fusto drum (30 lt) mt
C08060DZ/C	6	18	7,8	22,2	0,83	1,1	45,2	600	-	-	100
C08070DZ/C	7	21	9,1	25,9	1,17	1,5	61,6	500	-	100	-
C08080DZ/C	8	24	10,4	29,6	1,51	2,0	80,4	400	-	100	-
C08100DZ/C	10	30	13,0	37,0	2,25	3,2	126,0	200	100	-	-
C08130DZ/C	13	39	16,9	48,1	3,90	5,3	212,0	150	50	-	-
C08160DZ/C	16	48	20,8	59,2	5,79	8,0	322,0	100	50	-	-
C08190DZ/C	19	57	24,7	70,3	8,39	11,2	454,0	75	25	-	-
C08200DZ/C	20	60	26	74	9	12,5	503,0	50	-	-	-

La catena puo' essere venduta anche in matasse. Per maggiori informazioni contattate l'ufficio commerciale.
The chain can also be sold in bundles. For more information, contact the sales office.

