




**Grillo bolt per catena ad alta resistenza
Bolt type safety chain shackle HR**

Acciaio Carbon steel

- Zincato a caldo con perno verniciato rosso
Hot dip galvanized with red pin

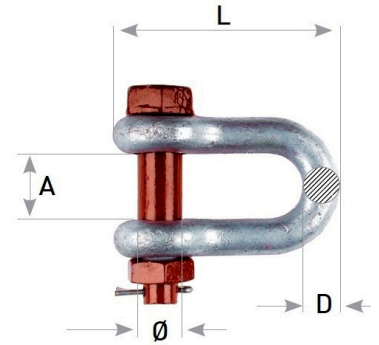

codice art. art. code	mis. pollici size inches	mis. mm size mm	q.tà per scatola qty per box	peso kg weight kg	carico lav. ton. W.L.L. tons	carico rott. ton. B.L. tons	A ±1,2 mm	D ±0,5 mm	Ø ±0,2 mm	L ±2 mm
RL07-1601/12	1/2	12	25	0,34	2,00	12,00	20,6	12,7	16,0	77,0
RL07-1602/16	5/8	16	10	0,67	3,25	19,50	26,9	16,0	19,1	95,5
RL07-1603/20	3/4	20	10	1,14	4,75	28,50	31,8	19,1	22,4	115,0
RL07-1604/22	7/8	22	5	1,75	6,50	39,00	36,6	22,4	25,4	135,4
RL07-1605/25	1	25	5	2,52	8,50	51,00	42,9	25,4	28,7	151,0
RL07-1606/28	1+1/8	28	5	3,45	9,50	57,00	46,0	28,7	31,8	172,2
RL07-1607/32	1+1/4	32	5	4,91	12,00	72,00	51,6	31,8	35,1	190,5
RL07-1608/35	1+3/8	35	4	6,24	13,50	81,00	57,2	35,1	38,1	210,3
RL07-1609/38	1+1/2	38	3	8,40	17,00	102,00	60,5	38,1	41,4	230,0
RL07-1610/45	1+3/4	45	2	14,26	25,00	150,00	73,2	44,5	50,8	278,7
RL07-1611/50	2	50	1	18,85	35,00	210,00	83,0	50,0	57,0	323,6

