




## Maglia di connessione grado 80 G80 connecting link

Grado 80

• Verniciata Powder coated

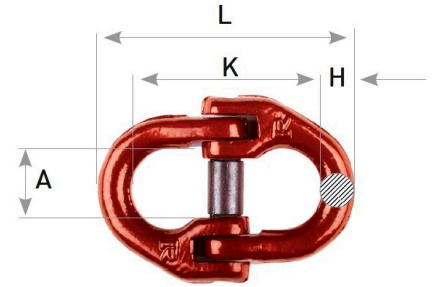

codice art. art. code	misura mm size mm	misura pollici size in	q.tà per scatola q.ty per box	peso kg weight kg	carico lav. ton. W.L.L. tons	carico rott. ton. B.L. tons	A ± 1,5 mm	L ± 2,5 mm	K ± 2 mm	H ± 1 mm
RL02-2602/6	6	1/4	40	0,07	1,12	4,48	19,0	58,0	43,0	6,8
RL02-2603/8	7/8	5/16	40	0,25	2,00	8,00	19,0	79,5	62,0	10,0
RL02-2604/10	10	3/8	40	0,35	3,15	12,60	23,8	93,0	72,0	12,6
RL02-2605/13	13	1/2	20	0,68	5,30	21,20	28,0	117,0	87,3	16,7
RL02-2606/16	16	5/8	12	1,10	8,00	32,00	34,3	148,0	103,0	20,6
RL02-2607/20	18/20	3/4	5	1,70	12,50	50,00	44,0	169,5	116,0	23,0
RL02-2608/22	22	7/8	1	2,20	15,00	60,00	49,0	193,5	133,0	26,5
RL02-2609/26	26	1	1	4,20	21,20	84,80	60,0	220,0	148,0	31,5
RL02-2610/32	32	1+1/4	1	7,19	31,50	126,00	80,0	281,0	190,0	32,0

